

SECTION OR SUBDIVISION

CORNER No. 280

TWP. 25, RANGE 10 E, W.M.

CORNER DESCRIPTION


ASPHALT STONE + ONTOP

== ee ==
W S E

W. FIR 18" S10°E 4'

" 8" S20°W 5'

1954 V.R.E.

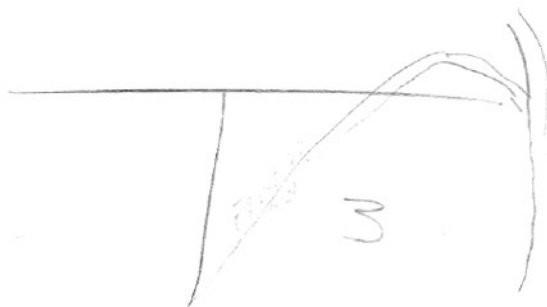

W.O. REF. BRICKS

MAR 2001

CARD OF

SECTION OR SUBDIVISION

TWP. $\frac{15}{25}$, RANGE 10, W.M.

CC	15
533	
54	53 25

CORNER No. ~~977~~ 280

CORNER DESCRIPTION

Larry Bishop fd.
 orig. mon &
 re-monumented
 it in 1979.
 see back



W.O. REF. _____

CARD OF

280

Description of monument and accessories I established to perpetuate the original location of this corner

Set 2 1/2" Brass Cap on a 2 1/2" x 30" Galvanized Iron Pipe in a mound of stone- Buried Original stone upside down next to monument set.

14" Lodgepole Pine S 4 1/2 W 83.0 feet scribed T2S R10E S4 upper blaze and a lower blaze scribed BT and with a 3/4" Brass Disk stamped PLS 896

Set Guard Post East with U.S.F.S. sign 54-4
Added U.S.F.S. Bearing Tree signs and red paint to 3 BT's

I hereby certify the above corner was re-established as herein described on Sept. 5, 1979

T1S R10E

CC

833

Brass Cap marked

S4 | S3

T2S

1979

PLS 896

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Larry D. Bishop

OREGON
JULY 11, 1959
LARRY D. BISHOP
896

Office of _____ County Surveyor _____ County of _____ Hood River

State of _____ Oregon _____, I hereby certify that the within instrument was filed in this office for record on the 23 day of October 1979

Larry D. Bishop _____ by _____ (DEPUTY)


(COUNTY OFFICIAL)

CC0280

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Deputy Fred Mensch in 1912 set a Basalt stone
18 x 15 x 12 ins. with 3 grooves on E and W faces
and marked
12" Fir S14 E- 9 lks
7" Fir S20 W- 11 lks

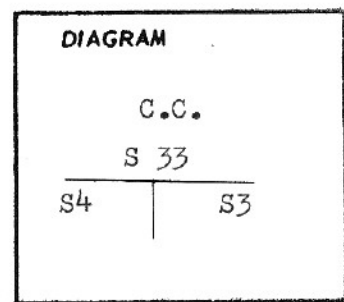

Description of corner evidence found:

Stone 18 x 15 x 12 ins. with X on top - C.C. on South - 3 grooves on E and W edges
Orig. 7" Fir now a Wh. Fir stump 1' high scribing rotted away S27 W 7.3 feet recorded
as S20 W 7.3 feet
Orig. 12" Fir now 16" Wh. Fir obvious face grown over S8 E 5.6 feet recorded as
S 14 E- 5.9 feet

Description of monument and accessories established to perpetuate the original location of this corner

Set 2 1/2" Brass Cap on a 2 1/2" x 30" Galvanized Iron Pipe in a mound of stone- Buried
Original stone upside down next to monument set.
14" Lodgepole Pine S 4 1/2 W 83.0 feet scribed T2S R10E S4 upper blaze and a lower blaze
scribed BT and with a 3/4" Brass Disk stamped PLS 896
Set Guard Post East with U.S.F.S. sign 54-4
Added U.S.F.S. Bearing Tree signs and red paint to 3 BT's
I hereby certify the above corner was re-established as herein described on Sept. 5, 1979

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Larry D. Bishop

OREGON
JULY 11, 1959
LARRY D. BISHOP
896

Brass Cap marked

T1S R10E

CC

833

S4

S3

T2S

1979

PLS 896

Office of..... County Surveyor..... County of..... Hood River.....
State of..... Oregon....., I hereby certify that the within instrument was filed in this office
for record on the 23 day of October 1979
[Signature]..... by.....
(COUNTY OFFICIAL) (DEPUTY)

SEE DRWG #79104