

LAND CORNER MONUMENT RECORD

INDEX FILE No. **Z5** USDA-FOREST SERVICE

LOCATION


CC 460

HOOD RIVER COUNTY
STATE OF OREGON
WILLAMETTE MERIDIAN

R. 9 E.

**T.
2
N.**

	6	5	4	3	2	1
	7	8	9	10	11	12
	18	17	16	15	14	13
	19	20	21	22	23	24
	30	29	28	27	26	25
	31	32	33	34	35	36
	6	5				

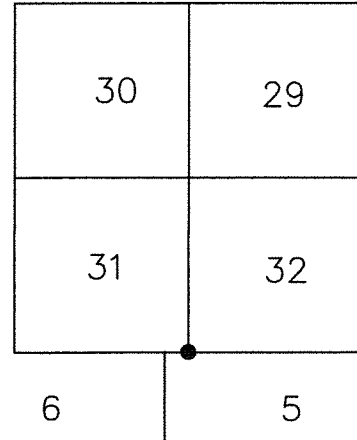

TOWNSHIP 2 NORTH RANGE 9 EAST SOUTH 31/32 SECTION CORNER

TYPE OF MONUMENT; TIES TO BEARING TREES, OBJECTS, etc.

(SKETCH)

FOUND BEARING TREE
18" DOUGLAS FIR

FOUND BEARING TREE
15" DOUGLAS FIR



SECTION 31

SECTION 32

FOUND 3" BRASS
CAP ON IRON PIPE
SECTION 31/32

SECTION 5

BASIS OF BEARING:
COMPASS DECLINATION

**REGISTERED
PROFESSIONAL
LAND SURVEYOR**

OREGON
December 30, 2005
ERIK M. CARLSON
72306

FOUND SOUTH SECTION CORNER
COMMON TO SECTION 31/32/5
FOUND A 3" BRASS CAP
UPDATED CORNER NOTES: CC#460
From which

A 16" DOUGLAS FIR (new BT) bears South 50°00' West a distance of 13.8' feet from Corner. BT was blazed and painted with red band. Set washer and nail L.S. 72306

A 18" Douglas Fir (existing BT) bears North 40°00' West a distance of 51.4 feet.

A 16" Stump (existing BT), bears North 25° West a distance of 14.3'

A Post with sign in a mound of rocks with BT tags, West a distance of 3.0 feet.

A 15" Douglas Fir (existing BT) with tag, monument bears North 01°00' East a distance of 37.1 feet.

REMARKS: (History of Corner, etc.)

- 11/24/1969 – CORNER WAS RE-ESTABLISHED BY HOOD RIVER COUNTY, CORNER CARD #460
60" D.FIR STUMP MARKED S31CC BT, N31°W DISTANCE OF 19.5 FEET, NOT FOUND
OLD G. FREY 2" IRON PIPE WITH BRASS CAP., N 53°30'W A DISTANCE OF 27.5 FEET NOT FOUND
50" D.FIR MARKED T1N R9E BT, N84°E
- 10/7/1976 CORNER VISITED
4 FOOT TALL 24" STUMP, 14 FEET
28" DOUGLAS FIR, BEARS S31°E, 8 FEET.
- 10/7/1979 RECOVERED HOOD RIVER COUNTY BRASS CAP (C.S.79103)
28" BURNT FIR STUMP, N63°W-33 FEET, NOT FOUND
24" BURNT FIR STUMP, N30°W-14.3 FEET, NOT FOUND
24" BURNT FIR STUMP, S30°E-8 FEET, NOT FOUND
- 10/1/2013 CORNER VISITED-NEW BT'S (C.S.2013-053)
14" FIR N40°W-51.4' SCRIBED T2N R9E S31 BT, RECOVERED
14" FIR N01°E-37.1' SCRIBED T2N R9E S32 BT, RECOVERED

DIRECTIONS TO CORNER: FROM INTERSECTION OF NF ROAD No. 2810 AND PUNCH BOWL ROAD TRAVEL WESTERLY ON 2810 APPROXIMATELY 7 MILES TO AN EVIDENT LOGGING CLEAR CUT LINE. CORNER IS APPROXIMATELY 600' NORTH OF ROAD, HEAD WEST ALONG NORTH SIDE OF CLEAR CUT TO LOG DECK AREA, FOLLOW SIDE SLOPE WEST TO CORNER.

GRID COORDINATES; ORGN; OREGON NORTH ZONE 3601, NAD 83(2011) EPOCH 2010.00

NORTHING EASTING
709793.08 7887267.02

NAME: ERIK M. CARLSON

DATE: DECEMBER 1, 2021

TITLE: TERRA SURVEYING

REGISTRATION NO. OR PLS 72306

SECTION OR SUBDIVISION


31/32

CORNER No.

460

TWP. 2N, RANGE 9 E, W.M.

CORNER DESCRIPTION

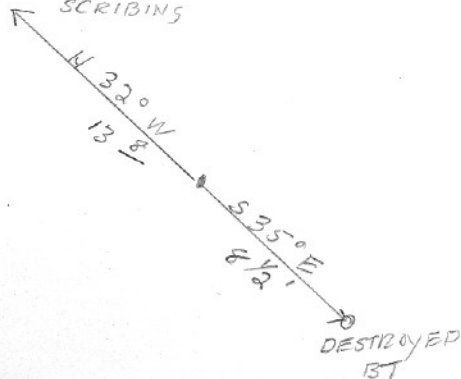24" BT. NO LESIBLE
SCRIBINGS~~RESET CORNER~~~~REMOVED 2" PIPE +~~~~SET 2" GAL PIPE W/~~~~BRASS CAP MKD~~~~T2N R9E~~~~S31 1532~~~~6TIN~~~~RESET 11-24-69~~~~HOOD RIVER COUNTY~~

W.O. REF.

CARD OF

over →

Corner visited June 175 by
A. Hutson. Cor. in good
condition, BT's destroyed
by fire,

460