

SECTION OR SUBDIVISION 1/4 COR 29 | 28 CORNER No. 879

TWP. 2N, RANGE 9 E, W.M.

CORNER DESCRIPTION

B.C. WI 2 1/2" I.P. IN

MD OF STONES.

SET BY TEC 6/1980

FD. SCRIBED STONE

WI 2 OR 6 BT'S

SCRIBED STONE BURIED

BESIDE BX PIPE

9" D.F. MKD "1/4 S 29 BT"



N 46° W
4 8'



28

29

S 46° E
8 3'



15" D.F. MKD
"1/4 S 28 BT"

W.O. REF. _____

CARD OF

Index File No. T-9

CORNER RECORD (SEARCH)
(Ref. FSM 7151.4)


Tract or Survey No. CS81-097

Cor. No. 28 & 29

T 2 N. R. 9 E. R.D. Hood River County Hood River
Merid. Willamette N.F. Mt. Hood State Oregon

CORNER DIAGRAM

DESCRIBE CORNER MONUMENT FOUND

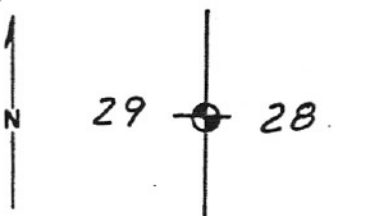

Scribed stone and mound of stone.

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

17" fir stump bears N. 55° W. 14.2 ft. to face.
24" fir stump bears S. 30° E. 10.4 ft. to face.

PHOTO IDENTIFICATION DATA

Photo No. _____
Filed At. _____
Object Ident. _____
Ident. By _____
Signature _____

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

From junction roads N.-20 and N-21 go south 0.3 mile.
Corner is 250 ft., more or less, left (east).

PLANE COORDINATE POSITION DATA

State _____ Zone _____
X _____
Y _____
Estab. By _____
Agency _____

Signature *Lawrence E. Jones*

Title Surveyor Division Headquarters Date June, 1980 7100-52-(3.68)

CORNER RECORD (PERPETUATION)

T-9

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

Set brass disc. on 2-1/2" galv. pipe, 30" long, 24" in the ground, and built a mound of stone.

Scribed stone was buried beside pipe.



ACCESSORIES: DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

A fir 15" dia. bears S. 46° E. 8.3 ft., marked 1/4 S 29 BT. → 28?
A fir 9" dia. bears N. 46° W. 4.8 ft., marked 1/4 S 29 BT.

Work Done By Lawrence E. Jones Title Surveyor Date 6/80 State Registration No. LS 994 or Agency _____

Certified Cor. Record Prepared? Yes No Filed At. Date

REMARKS

Index

File No. T-9

CORNER RECORD (SEARCH)

(Ref. FSM 7151.4)

CC 0879

Tract or

Survey No. CS81-097

Cor.

No.

1/4

28 & 29

T 2 N. R. 9 E.

R.D. Hood River


County Hood River

Merid. Willamette

N.F. Mt. Hood

State Oregon

CORNER DIAGRAM



DESCRIBE CORNER MONUMENT FOUND

Scribed stone and mound of stone.

DESCRIBE BEARING TREES OR OTHER OFFICIAL ACCESSORIES FOUND

17" fir stump bears N. 55° W. 14.2 ft. to face.
24" fir stump bears S. 30° E. 10.4 ft. to face.

PHOTO IDENTIFICATION DATA

Photo No. _____

Filed At. _____

Object Ident. _____

Ident. By _____

Signature

PLANE COORDINATE POSITION DATA

State Ore Zone North

X 717,123.46

Y 1,690,872.29

Estab. By TEC

Agency

DESCRIBE CORNER LOCATION RELATIVE TO NEAR-BY FEATURES, ALSO HOW TO REACH CORNER

From junction roads N.-20 and N-21 go south 0.3 mile.
Corner is 250 ft., more or less, left (east).

Signature

Title Surveyor

Division

Headquarters

Date

June, 1980


7100-52 (3 68)

CORNER RECORD (PERPETUATION)

MONUMENT: DESCRIBE NEW MONUMENT SET, OR WORK DONE TO PRESERVE EXISTING MONUMENT

Set brass disc. on 2-1/2" galv. pipe, 30" long, 24" in the ground,
and built a mound of stone.

Scribed stone was buried beside pipe.



ACCESSORIES: DESCRIBE NEW BT'S WITNESS OBJECTS ETC. ESTABLISHED, OR WORK DONE TO PRESERVE EXISTING EVIDENCE

A fir 15" dia. bears S. 46° E. 8.3 ft., marked 1/4 S 29 BT.
A fir 9" dia. bears N. 46° W. 4.8 ft., marked 1/4 S 29 BT.

Work Done By Lawrence E. Jones Title Surveyor Date 6/80 State Registration No. LS 994 or Agency

Certified Cor. Record Prepared? Yes No Filed At: Date

REMARKS