


#1

**FILED**

JAN 9 1970  
*Carla Van Glabing*  
 COUNTY SURVEYOR

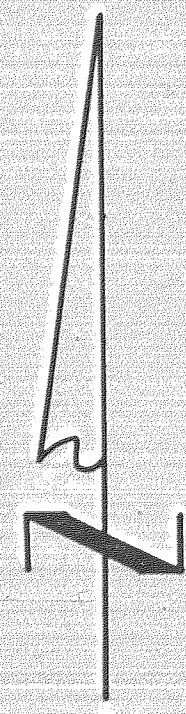

Basis of bearing is north as shown by deed and plat and is assumed to be correct.

I, Roy L. Hill, hereby certify that this plat correctly represents a survey made under my direction in conformance with the requirements of the Oregon Land Surveyors Laws at the request of Mark Namba and George Kinoshita. There are no visible encroachments other than those shown hereon.

REGISTERED  
 OREGON  
 LAND SURVEYOR

*Roy L. Hill*

JULY 9, 1962  
 ROY L. HILL  
 578

PLAT OF  
 NAMBA & KINOSHITA  
 SE 1/4 SEC. 13, T. 1 N., R. 9 E. W.M.

J. S. DIELSCHNEIDER & ASSOC. INC  
 HOOD RIVER, OREGON  
 SURVEY: R.L.H. DATE: 7-27-69  
 DRWN: N.W. DATE: 10-6-69  
 SCALE: 1" = 200' DRWG: 6934



JAMES S. DIELSCHNEIDER & ASSOCIATES, INC.

Engineering & Planning

Hood River (503) 386-2912  
October 8, 1969

606 State Street  
Hood River, Oregon 97031

**FILED**

Mr. Carlos Van Elsberg, Director  
Department of Public Works  
Hood River County  
P.O. Box 457  
Hood River, Oregon 97031

JAN 9 1970  
*Carlos Van Elsberg*  
COUNTY SURVEYOR  
BY \_\_\_\_\_  
DELMER

FIELD NOTES:

Mark Namba, George Kinoshita, Project No. 6956, survey in the SE $\frac{1}{2}$  of Sec. 13 T1N, R9E, WM Hood River County, Oregon.

Crew: R. L. Hill, Party Chief  
J. G. Mahoney, Instrumentman  
J. P. Gorman, Chainman

DATES PERFORMED: May 9, 13, 14, 20

WEATHER: Fair warm.

On May 12, 1969, our firm was retained by Mr. Mark Namba and Mr. George Kinoshita to locate the boundary between their property located in the SE $\frac{1}{2}$  of sec 13, T1N, R9E WM.

We referred to Hood River County Tax Map No. 1N 9 13 and records of previous surveys in the area.

CORNERS FOUND: SE Corner Sec 13, Center  $\frac{1}{2}$  corner sec 13., and various lot corners.

CORNERS SET: An axle with a 6" plate set at the south corner, a 2" iron pipe set at the north corner. The corners were set by projecting the south line of the section from the south east section corner, turning the angle to produce the line running northerly. The distances were varified by measuring from found corners.

Monuments found and set, together with the measured distances and bearings used on this survey, are shown on the attached map, which is by reference made a part of these notes.

I certify that this work was done under my direct supervision.

REGISTERED  
OREGON  
LAND SURVEYOR

*Roy L Hill*

JULY 9, 1962  
ROY L. HILL  
578