

W. 1/4 COR.
SECTION 29
FD. 1/2" I.R.

FD. P.K. NAIL
AS PER D.L.C.
10/4/77 SURVEY

1/16" COR.
NOT SET

333.50

S. 89° 44' 25" E.

1334.65

5.00° 15' 04" E.
683.50

FD. 1/2" I.R.
AS PER D.L.C.
10/4/77 SURVEY

STANDLEY
PARCEL


500
S. 89° 26' 46" E.
500
N. 00° 33' 14" E.

406.28
302.0
N. 89° 26' 46" W.
EXISTING 20 ROAD
N. 89° 26' 46" W.

N. EASTERLY R/W LINE
STATE HWY 282

SET-RAILROAD SPIKE

SOUTH LINE OF N.E. 1/4 OF S.W. 1/4 OF SECTION 29
AS PER D.L.C. 10/4/77 SURVEY S. 89° 26' 46" E.

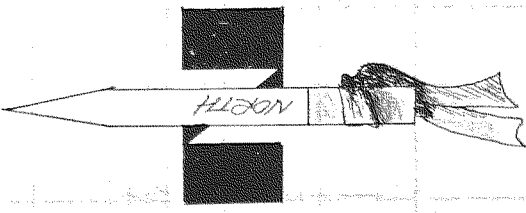

SCALE 1" = 100'
● = 1/2" IRON ROD MONUMENT
SET UNLESS NOTED
BASIS OF BEARING AS PER
D.L.C. 10/4/77 SURVEY

SURVEY

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Danny L. Cron

OREGON
AUGUST 22, 1975
DANNY L. CRON
1028

Dec. 20, 1979

FOR-MAYNARD STANDLEY
LOCATION- ROAD EASEMENT
(LOCATED IN THE S.W. 1/4 OF
SECTION 29, T.1N., R.10E.,
W.M.)

HOOD RIVER COUNTY,
OREGON

DRAWN BY
L.H. Daley

FILED

DEC 27 1979

CLERK
COUNTY SURVEYOR

DEPUTY

12-015
79112